

FS-5 Series Heavy Duty Footswitches




Features:


- Robust die cast aluminum body or Iron cast body
- Four Switch ratings available:
 - 15A 125/250/480V AC
 - 20A, 125/250/480V AC, 1HP/125VAC, 2HP/250VAC
 - 25A, 125/250/480V AC, 1HP/125VAC, 2HP/250VAC
- Operating temperature range: -20°C to +80°C (-4°F to +176°F)
- UL/cUL approved (E240199)
- IP65 Rated
- Conduit available in: M20, 1/2NPT and PG13.5

Dimensions:



FS-5

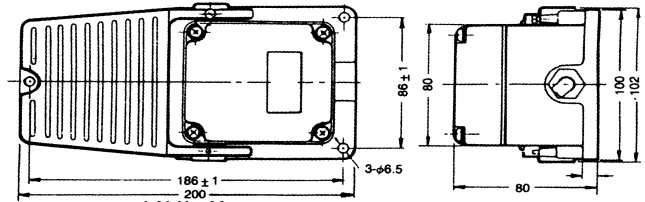

FS-5-H

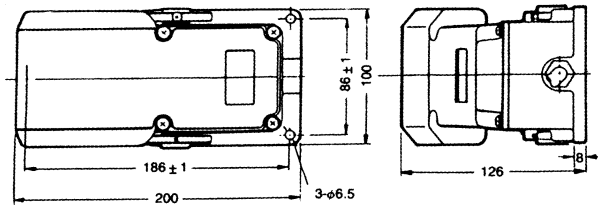

FS-5-G

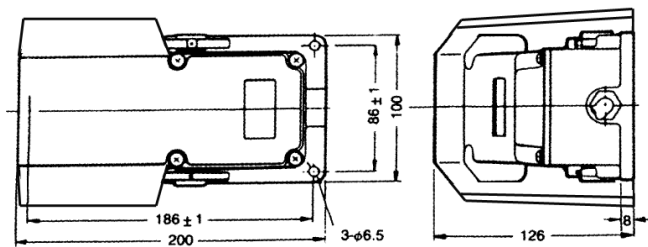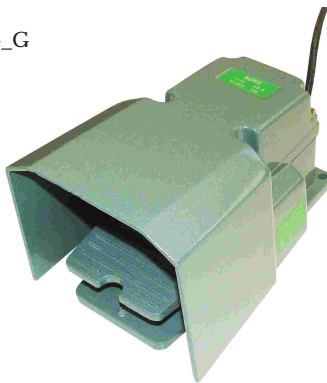

Selection Guide:

FS-5 - 15

- Micro switches
- 15: 15A 125/250/480VAC
 - 20: 20A 125-250VAC
1HP/125VAC, 2HP/250VAC
 - 25: 25A 125-250VAC
1HP/125VAC, 2HP/250VAC
 - V: 5A 125/250VAC potentiometer

- G Guarding Options
- Blank: No Guard
 - H: Guard from Top
 - G: Fully Guarded

- D - 2 - P
- Option #1
- Blank:
 - D: Maintained
 - A: Anti-Tripped

- Cable length
- 2: Cable Length

- Option #2
- blank:
 - P: with 3 prong series plug
 - S: 2 stages

- C Conduit Type
- A: 1/2NPT
 - B: PG13.5
 - C: M20 x1.5