


RELAY



specification

MODEL		MY SERIES			LY SERIES			MK SERIES	
		MY-2	MY-3	MY-4	LY-2	LY-3	LY-4	MK2P-I	MK3P-I
EXTERNAL DIMENSION (mm)	L	27.6			27.6	27.6	27.6	34.7	
	W	21.5			21.5	31.5	41.5	34.7	
		34			36	36	36	52	
CONTACT FORM		2A2B	3A3B	4A4B	2A2B	3A3B	4A4B	2A2B	3A3B
CONTACT CAPACITY		28V DC 220V AC		28V DC 220V AC		28V DC 220V AC		28V DC 220V AC	
		5A		3A		15A10A		10A 5A	
COIL VOLTAGE	DC	6,12,24,36,110 V			6,12,24,36,48,110V			6,12,24,48,60,110,220V	
	AC	6,12,24,36,110,220V			6,12,24,36,48,110,220V			6,12,24,36,48,110,127,220,380V	
CONTACT RESISTANCE		≤ 50mΩ			≤ 50mΩ			≤ 50mΩ	
INSULATION RESISTANCE		≥ 1000MΩ			≥ 1000MΩ			≥ 500MΩ	
DIELECTRIC STRENGTH		1000V AC 50/60Hz			1500 AC 50/60 Hz			1500V AC 50/60Hz	
SERVICE LIFE	MECHANICAL	10,000,000			10,000,000			10,000,000	
	ELECTRICAL	100,000			100,000			100,000	
TERMINAL		OUTLET AND PRINTED-CIRCUIT BOARD			OUTLET AND PRINTED-CIRCUIT BOARD			OUTLET SOLDER	

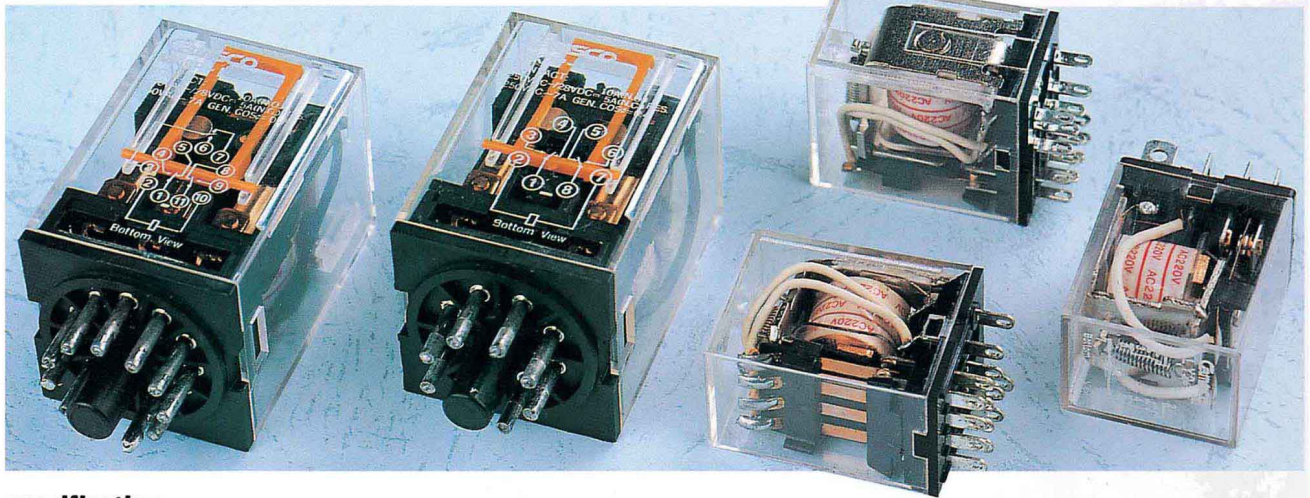