

FS-1 Series Stainless Steel Medical Foot Switches (IPX8)


Features

- Robust all stainless steel design for corrosion resistance
- With nonskid base pad and foot treadle pad
- UL/CSA/CE/CCC approved
- Custom wiring available

Specifications

Operating Frequency	60 ops/min
Insulation Resistance	>100MΩ@500V DC
Contact Resistance	<25mΩ (initial)
Rated Current/Voltage	10A/250VAC
Dielectric Strength	1000VAC for 1 min between current carrying parts 2500VAC for 1 min between non-current carrying parts
Service Life	1 x10 ⁶ (operations)
Operating Temperature	-30~+80°C (-22~176°F)
Degree of Protection	IPX8 (NEMA 4, 4x, 6, 6P)

Selection Guide:

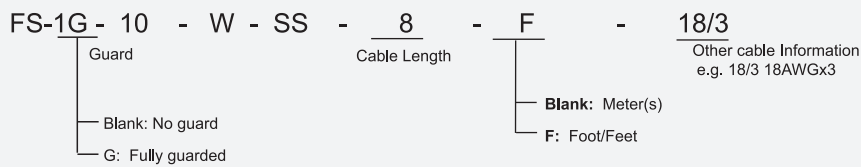


Dimensions:

FS-1-10-W-SS (Not wired)

FS-1-10-W-SS-2-18/3 (Prewired, 2 meters, 18AWGx3, 1NO)

FS-1-10-W-SS-8F-18/3 (Prewired, 8ft, 18AWGx3, 1NO)

FS-1-10-W-SS-P-8F-18/3 (Prewired, 8ft, 18AWGx3, with series plug)

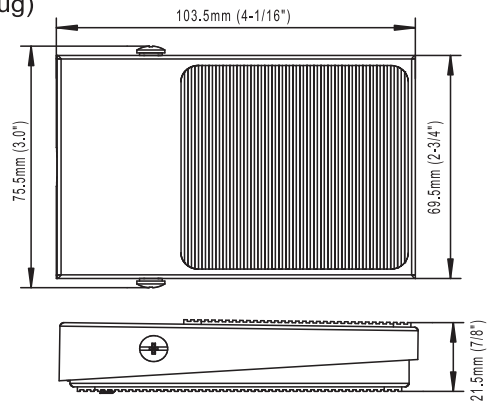

FS-1G (Orange)

FS-1G-W (Medical white)

FS-1G-SS (Stainless steel)

FSP-1G(Plastic)

