

## CSH Series Pendant Stations

### Features

- Safety yellow high impact fiber reinforced plastic body
- NEMA 4X watertight for indoor and outdoor applications
- Ambient temperature range: -20 to 158F (-29 to 70C)
- UL and cUL listed capabilities
- Choice of single-speed, two-speed, or on-off
- Optional emergency stop button



### Electrical Contact Ratings (OSHA Regulation, Section 1910.70, Overhead and Gantry Cranes, limits the voltage of pendant push buttons to 150 Vac or 300 Vdc.)


| Volts | AC NEMA600                    |      |       |  |                                   | Resistive<br>75% Power Factor | Volts | DC NEMAP600               |                                   |
|-------|-------------------------------|------|-------|--|-----------------------------------|-------------------------------|-------|---------------------------|-----------------------------------|
|       | Inductive<br>35% Power Factor |      |       |  | Continuous<br>Carrying<br>Amperes |                               |       | Inductive and Resistive   |                                   |
|       | Make                          |      | Break |  |                                   |                               |       | Make and Break<br>Amperes | Continuous<br>Carrying<br>Amperes |
| A     | VA                            | A    | VA    | Make, Break and<br>Continuous<br>Carrying<br>Amperes |                                   |                               |       |                           |                                   |
| 120   | 60                            | 7200 | 6     | 720  | 10                                | 10                            | 120   | 1.1                       | 5                                 |
| 240   | 30                            | 7200 | 3     | 720  | 10                                | 10                            | 240   | 0.55                      | 5                                 |
| 480   | 15                            | 7200 | 1.5   | 720  | 10                                | 10                            | 600   | 0.2                       | 5                                 |
| 600   | 12                            | 7200 | 1.2   | 720  | 10                                | 10                            |       |                           |                                   |

### For control of single-speed hoist motors

| Number of operators  | Contact block(s) and scheme                         |                    | Reference  |
|--|---|--------------------|------------|
|  | Per direction                                       | For Emergency stop |            |
| 2<br>mechanically interlocked  | 1 N/O<br>PBC22-10A                                  |                    | CSH22-0201 |
|  | 1 N/C + 1 N/O<br>PBC22-01A<br>+<br>PBC22-10A        |                    | CSH22-0205 |
| 3<br>mechanically interlocked<br>+ 1 latching<br>Emergency stop<br>Ø 30 mm<br>operator | 1 N/O<br>PBC22-10A                                  |                    | CSH22-0301 |
|  | 1 N/C + 1 N/O<br>PBC22-01A<br>+<br>PBC22-10A        |                    | CSH22-0305 |
| 2<br>mechanically interlocked  | 2 step<br>1 N/O + 1 N/O<br>staggered<br>2*PBC22-10A |                    | CSH22-0207 |
| 3<br>mechanically interlocked<br>+ 1 latching<br>Emergency stop<br>Ø 30 mm<br>operator | 2 step<br>1 N/O + 1 N/O<br>staggered<br>2*PBC22-10A |                    | CSH22-0307 |

**Dimensions**

**CSH-02\*\***

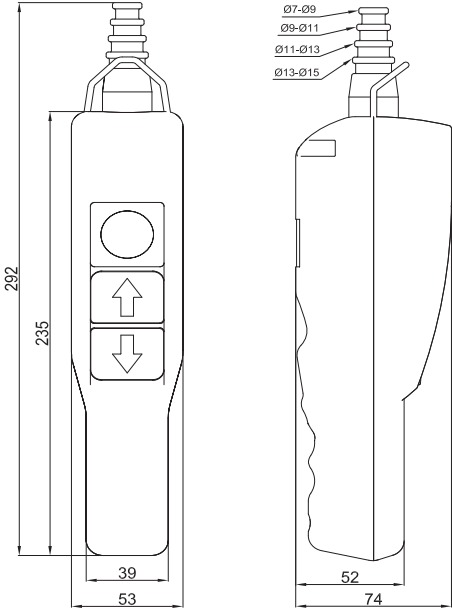

**CSH-03\*\***

