


T-Series Terminal Blocks

Dimensions



Rated Insulation Voltage U_i 600V

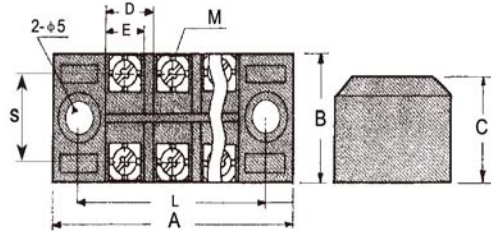


Type	Rated Current (600V)	Number of Poles	Dimensions (mm)								
			A	B	C	D	E	/TH	L	M	S
TB-1503	15	3	45	22	15	8.8	6.6	5/	34.8	3	13.5
TB-1504		4	54						43.8	3	
TB-1506		6	72						61.8	3	
TB-1512		12	127						116.8	3	
TB-2503	25	3	55.6	30	16.7	12	8.5	5/	45.3	4	18
TB-2504		4	67.6						57.3	4	
TB-2506		6	91.6						81.3	4	
TB-2512		12	163.6						153.3	4	

TB



U_i Rated Insulation Voltage U_i 600V

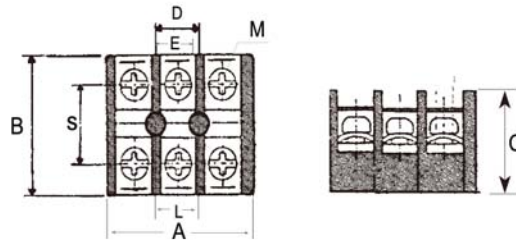

Type	Rated Current (600V)	Number of Poles	Dimensions (mm)								
			A	B	C	D	E	/TH	L	M	S
TC-603	60	3	92	46	35	33.8	21.8	5.8/	30.4	6	26
TC-604		4	112						60.8	6	
TC-1003	100 (UL)	3	104	55.4	39.1	34.4	22.4	5.8/	34.4	6	28
TC-1004		4	139						68.8	6	
TC-1503	150 (UL)	3	117	67.6	42.7	38.6	25.6	7/	38.6	8	30.5
TC-1504		4	156						77.2	8	
TC-2003	200	3	134	72.5	46.8	44.4	28.4	8/	44.4	8	34
TC-2004		4	178						88.8	8	
TC-3003	300	3	165	90	53.3	55.3	36.3	7/	54.9	10	48.5
TC-4003	400	4	165	90	53.3	55.3	36.3	7/	109.8	10	

TC