

Limit Switches with Manual Reset for Over-Speed Devices

Features

- Glass fiber reinforced plastic body
- Conform to EN 60947-5-1, IEC 60947-5-1, UL508,
- ASME A17.1/5, EN 81-1, EN 81-2 Standards
- High sensibility and low actuating force
- Galvanically separated contacts
- Positive Opening of NC contacts
- Conform to EN 50047 standard


Specifications

Operating Speed	0.05mm-0.5m/sec
Rated Current/Voltage	10A/600V AC (EN60947-5-1) AC15 A600 / DC13 Q300
Service Life	Mechanically 10 millions (operations)
Operating Temperature	-25~+50°C (-13~122°F) with no icing
Actuating force	6 N (+/- 2 N)
Actuating Distance	< 0.5mm
Contact Opening	2 x 2 mm
Degree of Protection	IP67

Selection Guide:


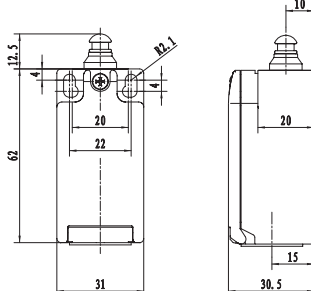

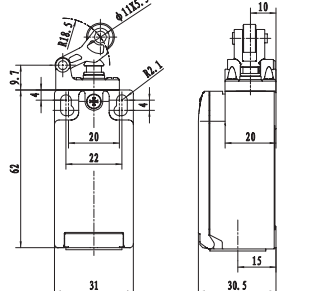

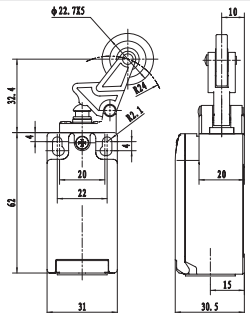

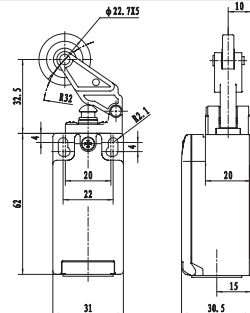

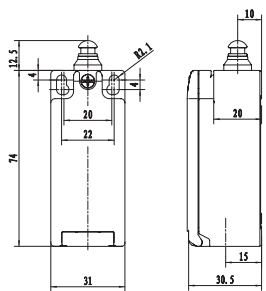

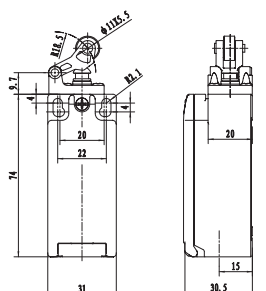

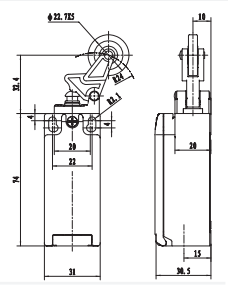

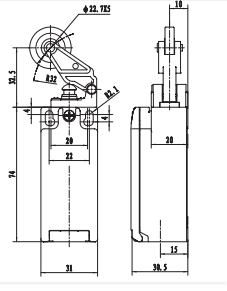
<p>SND41 04 SP</p> <p>Head Styles</p> <p>SND41: 1.5mm actuating</p> <p>SSD41: 0.5mm actuating</p>	<p>Contact Block</p> <p>For SND41</p> <p>SP: 1NO/1NC Contact</p> <p>For SLD41</p> <p>SL: 1NO/1NC contact</p> <p>SLO: 1NC Contact</p> <p>SL1: 1NO/1NC contact</p> <p>SL2: 2NC Contact</p> <p>SL3: 2NO Contact</p> <p>SL4: 3NC Contact</p> <p>SL5: 3NO Contact</p> <p>SL6: 2NC/1NO Contact</p>	<p>C - LAT</p> <p>Conduits</p> <p>A: 1/2"NPT</p> <p>B: PG13.5</p> <p>C: M20</p> <p>D: M16</p>
--	--	--

Dimensions Unit: mm

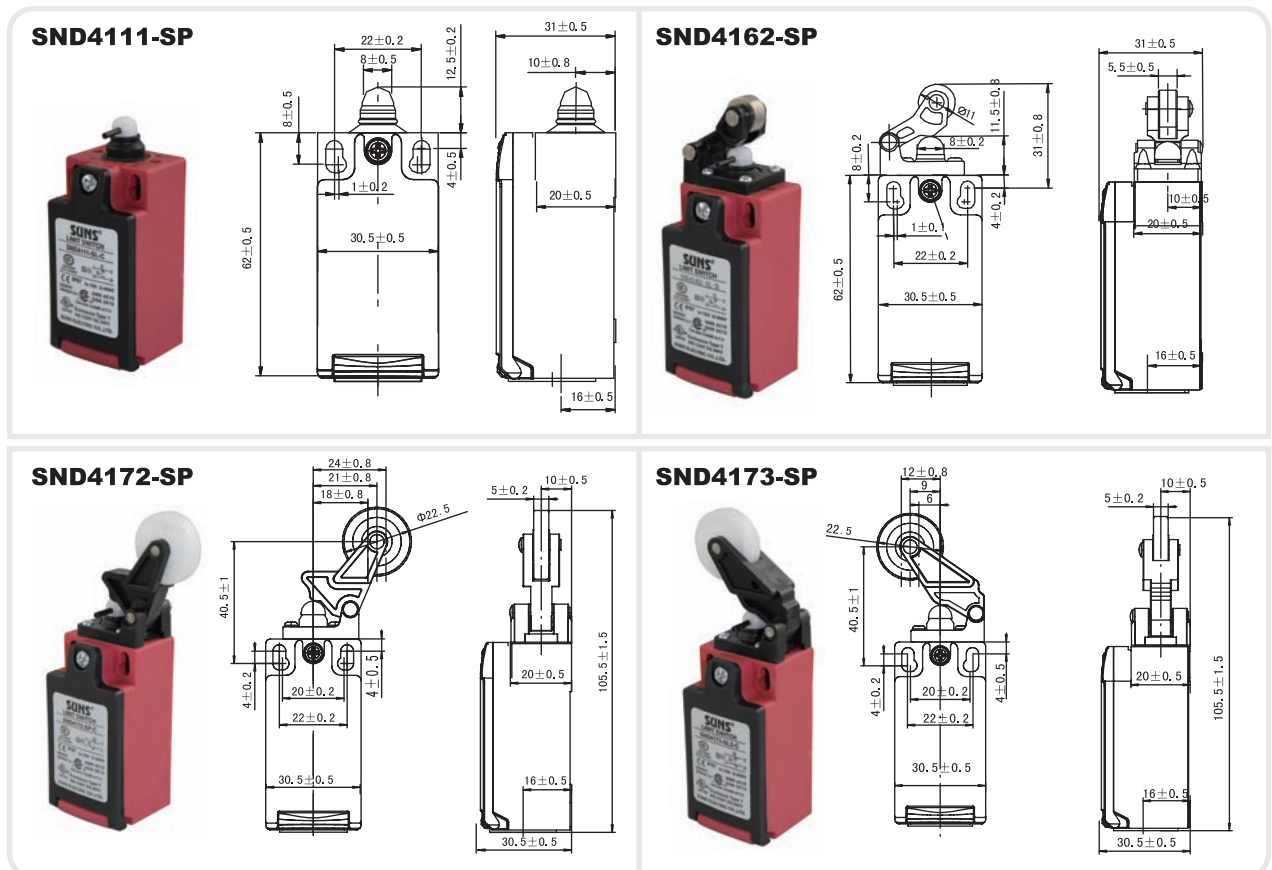

Limit Switches with Manual Reset for Over-Speed Devices

SSD4 Series

 	 
<p>Order Code Contact block</p> <p>SSD4111-S01 ⊕ slow action 1NC</p>	<p>Order Code Contact block</p> <p>SSD4162-S01 ⊕ slow action 1NC</p>
 	 
<p>Order Code Contact block</p> <p>SSD4172-S01 ⊕ slow action 1NC</p>	<p>Order Code Contact block</p> <p>SSD4173-S01 ⊕ slow action 1NC</p>
 	 
<p>Order Code Contact block</p> <p>SSD4211-SL ⊕ slow action 1NC/1NO BBM</p> <p>SSD4211-SL2 ⊕ slow action 2NC</p> <p>SSD4211-SL6 ⊕ slow action 2NC/1NO</p>	<p>Order Code Contact block</p> <p>SSD4262-SL ⊕ slow action 1NC/1NO BBM</p> <p>SSD4262-SL2 ⊕ slow action 2NC</p> <p>SSD4262-SL3 ⊕ slow action 2NC/1NO</p>
 	 
<p>Order Code Contact block</p> <p>SSD4272-SL ⊕ slow action 1NC/1NO BBM</p> <p>SSD4272-SL2 ⊕ slow action 2NC</p> <p>SSD4272-SL6 ⊕ slow action 2NC/1NO</p>	<p>Order Code Contact block</p> <p>SSD4273-SL ⊕ slow action 1NC/1NO BBM</p> <p>SSD4273-SL2 ⊕ slow action 2NC</p> <p>SSD4273-SL6 ⊕ slow action 2NC/1NO</p>