

FCP Series Surgical Microscope Foot Switch


Features

- High strength alloy plastic
- Use the central pedal to control zoom and focus
- The lever is used for microscopical positioning
- 6 additional buttons that can be specified
- Protection level IP X8
- Easy to clean
- Custom label
- RAL color is available

Specifications



| | |
|-----------------------|--|
| Operating Frequency | 60 ops/min |
| Insulation Resistance | >100MΩ@500V DC |
| Contact Resistance | <25mΩ (initial) |
| Rated Current/Voltage | Ith: 10A Ui: 300V AC or 10A/15A 250VAC |
| Dielectric Strength | 1000VAC for 1 min between current carrying parts 2500VAC for 1 min between non-current carrying parts |
| Service Life | Mechanically 1 x10 ⁶ (operations) Electrically 5 x10 ⁵ (operations) |
| Operating Temperature | -20~+80°C (-4~176°F) |
| Degree of Protection | IPX8 |

Selection Guide:

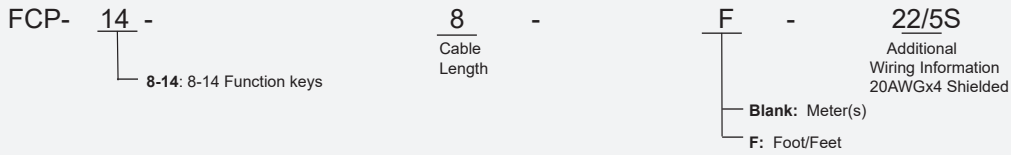

Dimensions:

FCP-14

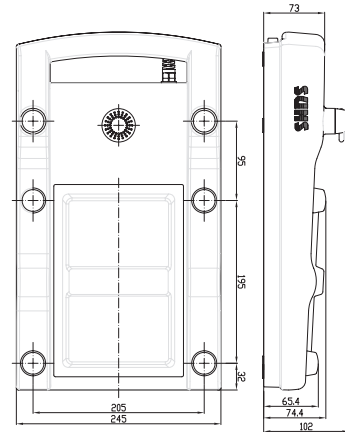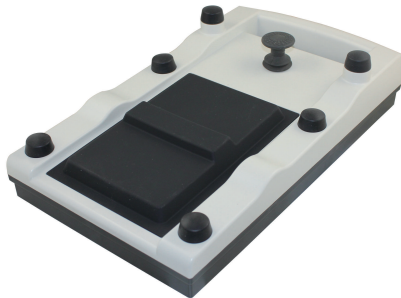

FCP-12

