

BD Series Emergency Disconnect Switches


Features

- Safely rupture full load currents in the event of an emergency
- Compact size with reduced installation costs
- Large DC rating up to 150A
- Optional coil to operate the contactor
- Optional magnetic blowouts
- Auxiliary contacts available
- IP55 rated

Specifications


Thermal Current Rating	125A
Service Life	Mechanically >3,000,000 (operations) Electrically >10,000 (operations)
Operating Temperature	-40 °C to 60 °C [-40 °F to 140 °F]
Coil Voltage Available	6-240VDC
Auxiliary Thermal Current Rating	15A
Protection Level	IP55

Selection Guide:

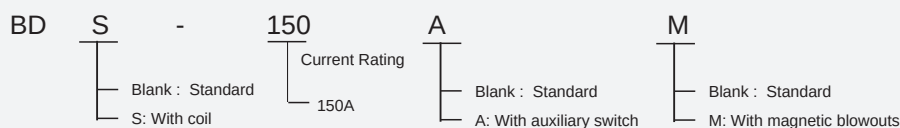

Pictures and Dimensions:

BDS-150

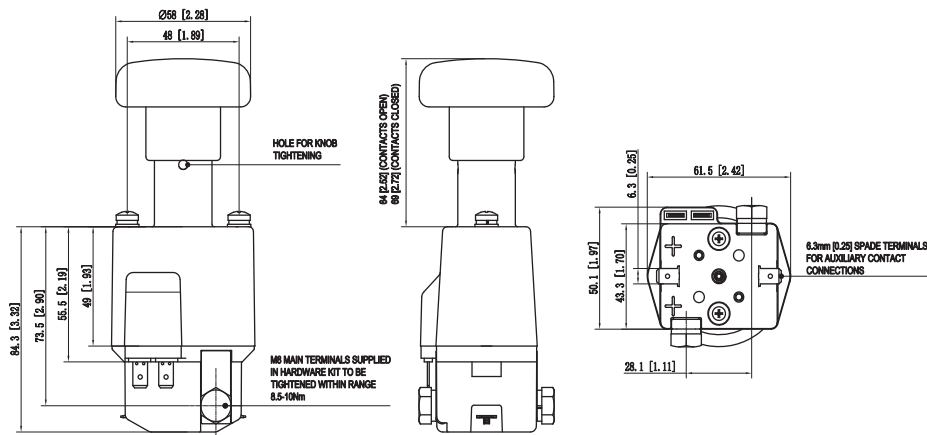

BD-150

